

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 13 TOWNSHIP 16 RANGE 4

DATE: 5-17-06

PARTY CHIEF: Wilcoxen

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-30-04

IN. S.P.C. E ZONE NAD '83

NAME: 16041306

N: 509041.6095(m)

E: 69151.8281(m)

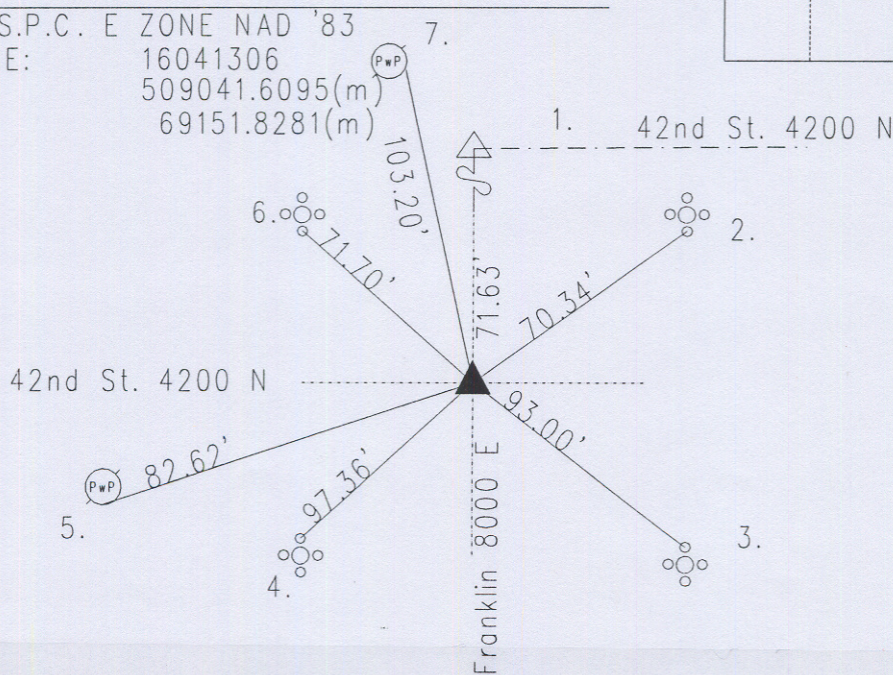

16041306 E Q corner

CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 20" beech W 11 links; 24" dogwood E 12 links per Marion County Atlas pg. 11. Reference dated 2-3-1947 by Thompson called stone found 15" down. Reference dated 11-4-1959 by Fleener called added ties. Reference dated 5-22-72 by SeFranka called railroad spike found. Reference dated 11-20-74 by Fortner called railroad spike found. Reference dated 1-7-76 by Wilcoxen called railroad spike w cut 'x' found. Reference dated 6-19-85 by Cleveland called railroad spike set. Reference dated 5-23-86 by Greene called railroad spike found. Reference dated 10-29-96 by Wilcoxen called found PK nail. Reference dated 5-25-06 by Wilcoxen called set Harrison per ties and GPS coordinates, no other points found.

REF.	DISTANCE	DESCRIPTION
1.	71.63'	Due N to W Q 18-16-5 Survey mark nail
2.	70.34'	Cut 'x' S bolt of aluminum pole base
3.	93.00'	Cut 'x' N bolt of aluminum pole base
4.	97.36'	Cut 'x' N bolt of aluminum pole base
5.	82.62'	Mag nail w/bw S PwP#24-419D 4"up
6.	71.70'	Cut 'x' S bolt of aluminum pole base
7.	103.20'	Mag nail w/bw F PwP#204-379B 18"up